


SEAS 4040 for 48 outlets (36/42dB)
Size: (L) 265 x (W) 190 x (H) 110 mm

FEATURES

- Digital and Analogue
- Worldwide Marine use
- Proven and reliable technology
- Simple and easy installation
- No additional accessories in system setup
- Excellent ESD and Surge protection
- Line amplifier for worldwide marine use
- Advanced ALC (Automatic Level Control) with LO-HI switch

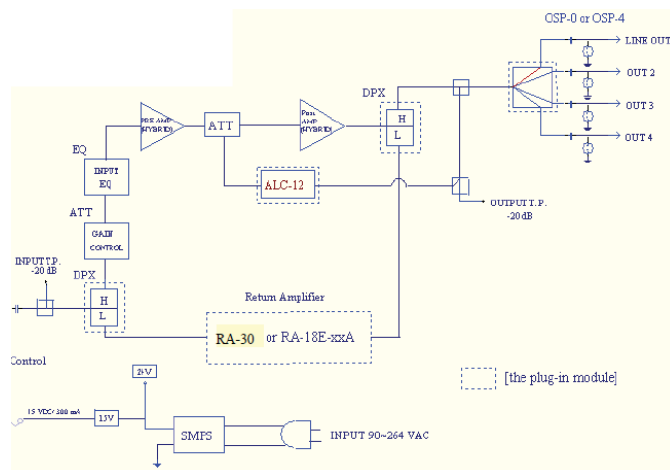

DESCRIPTION

SEAS 4040 w. 48 outputs (36/42 dB)

PART NO

4040



SEAS 4040

Line amplifier for 48 outlets; 36/44 dB

TECHNICAL SPECIFICATION

Size	(H) 265 x (W) 190 x (D) 110 mm
Housing	Aluminium Die-casting, Finishing: Black painted
Connectors	IN: 5/8"-24 NEF F-Female to 3/8"-32 UNEF F-Female Adaptor OUT: F-Female Connector (4 pcs)
Weight	3.50 Kg

Electrical Specification

RF Amplification		Push-Pull Hybrid Module
Operation Gain	(w/ RA-30)	100 KHz 16.5 dB min. 5 MHz 22.0 dB min. 27 MHz 27.0 dB min. 47~862 MHz 36.0 dB min. w. 4 outputs 47~862 MHz 42.0 dB min. w. 1 output 44.0 dB min.
IN-OUT		
Operation Gain		44.0 dB min.
Gain Control		0~ -18.0 dB (adj.)
Slope Control	(w/ MS-86/ 18)	0~ -18.0 dB (adj.)
Auto Level Control	(w/ ALC-12)	+/-12.0 dB
Noise Figure		8.0 dB typ. 9.0 dB max.
Output Level (Reference)		77 NTSC chs. +312 MHz digital* (97 / 102 / 94 dBu V)
Composite Second Order (CSO)		-60 dBc
Composite Triple Beat (CTB)		-60 dBc
Cross Modulation (XMOD)		-60 dBc
Return Loss		6 dB min.
(w/ Jumpers)	100~300 KHz	14 dB typ. 12 dB min.
	300 KHz~27 MHz	12 dB typ. 10 dB min.
	47~862 MHz	

General Specifications

Input & Output Test Ports	-20 +/- 2 dB, F-Female
Input & Output Impedance	75 Ohm
Surge Protection	7000 V for 1.2 x 50 us
Power Supply	110-230 Vac, 50/60 Hz
Fuse (For Power Supply)	0.2 A / 250 V (230 Vac)
Power Consumption (Including Powering output to Antenna)	16 W, (25W)
AC Cord	AC Inlet Module; 1,5m cord w. Schuko
Operating Temperature	-40 to +60°C

EMC & Safety

EMC	EN55027-2, EN61000-3-2/3-3/4-2-4-6
Safety	EN60950, EN60601
Dielectric Strength Test**	>2M Ohm, <1m A @2120VDC
Protective Earth Connection***	<0.1 Ohm



*) For digital channels at 550~862 MHz, carriers are -10 dB lower relative to analog channels.

***) Test by Hi-Pot tester

****) Test by Voltage Meter applied between the protective earth contact of the mains plug and all accessible conductive parts.

All specifications stated are subject to change without notice.