

3005010157

SPA-M6H-D

PA Panel Dual w/ 6 Zones, All Call, Dimmer-Flush w/ Handheld Mic.



Created: 04.07.2014, updated: 18.12.2015

page 1/3

www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Vingtor-Stentofon products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend. Zenitel – All rights reserved.

DESCRIPTION

- PA-panel for dual system
- Delivered with handheld microphone
- Built-in pre-amplifier with preset signal level and tone controls
- 6 zone selection buttons
- ALL, TALK and dimmer buttons.
- Microphone with PTT
- Replaceable text label to each zone button
- · Zone buttons have activation confirmation light
- Flush mounting, back box for wall mounting is available
- Zone memory for last zone selection on (2340110003 SPA-M6HDM-V2)
- Local mute contact for external loudspeaker (From hardware version 4.0)

This Vingtor-Stentofon Panel gives messages in one to six zones in a SPA-V2 public address and general alarm dual system. Installation in consoles or on-wall indoor.

Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback. Available from hardware version 4.0. This function must be in combination with relay box.

SPECIFICATIONS

GENERAL

Size (WxHxD)	144 x 144 x 82 mm
Weight w/microphone	0. 6 kg
Material	Black anodized aluminium
Mounting	Flush, wall with use of back box
Output signal	0.775mV 0dB
Sensivity microphone	-55dB +- 3dB at 1kHz rel. 1V/Pa
Connections	Plugable screw terminals for 2.5 mm2 cable
Cable glands	4 x PG-16
Cable size	6 x 2 x 0.75 mm2
Local mute relay, output	24V DC @ maximum 50mA
IP-rating	IP-44

TECHNICAL DIMENSIONS

Created: 04.07.2014, updated: 18.12.2015


page 2/3

www.zenitel.com


info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Vingtor-Stentofon products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend. Zenitel – All rights reserved.

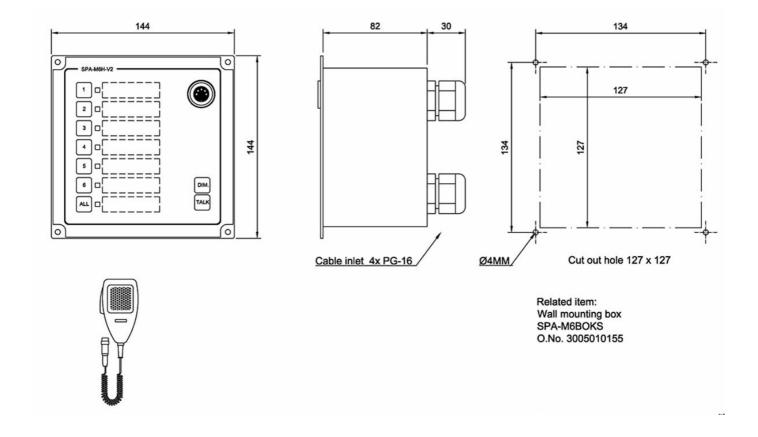

ACCESSORIES



SPA-M6BOKS

IRR-3

Created: 04.07.2014, updated: 18.12.2015

page 3/3

www.zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Vingtor-Stentofon products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.