

3005010203

SPA-W6A4-D

Dual Weatherproof PA and Alarm Panel 6 Zones



Created: 04.07.2014, updated: 18.12.2015

page 1/3

www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Vingtor-Stentofon products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend. Zenitel – All rights reserved.

DESCRIPTION

- Weatherprooof PA and Alarm panel for dual system
- Duplicated activating of abandon, general or manual alarms
- Contact for WP handheld microphone P-66 or P-66/10
- Built-in pre-amplifier with preset signal level and tone controls
- 6 zone selection buttons
- Alarm buttons with hinged transparent protecting cover
- Microphone with push to talk (PTT)
- Contact for WP handheld microphone P-66 or P-66/10
- Replaceable text label to each button
- · Wall mounting, outdoor or indoor
- Zone memory for last zone selection on (2340110007 SPA-W6A4DM-V2)
- Local mute contact for external loudspeaker (from hardware version 4.0)

This weatherproof panel is a combined alarm and PA panel for use in a SPA-V2 public address and general alarm dual system. The PA part can operate six public address zones. Can be used as a PA-panel or Alarm panel or in combination. Sixteen different configuration of alarm sounds available.

Version 2340110007 SPA-W6A4DM-V2 have zone memory for the previous zone selection when talk button is released.

Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback. Available from hardware version 4.0 This function must be in combination with relay box.

SPECIFICATIONS

GENERAL

| Size (WxHxD) | 140 x 230 x 125 |
|----------------------|--|
| Weight | 0. 7 kg |
| Material | ABS plastic |
| Mounting | Wall |
| Output signal | 0.775mV 0dB |
| Sensivity microphone | 200 ohm / 0,5mV |
| Connections | Plugable screw terminals for 2.5 mm2 cable |
| Cable glands | 4x PG-16 |
| Cable size | 6 x 2 x 0.75mm2 |
| Protection | IP-66 |
| | |

TECHNICAL DIMENSIONS

Created: 04.07.2014, updated: 18.12.2015


page 2/3

www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Vingtor-Stentofon products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend. Zenitel – All rights reserved.

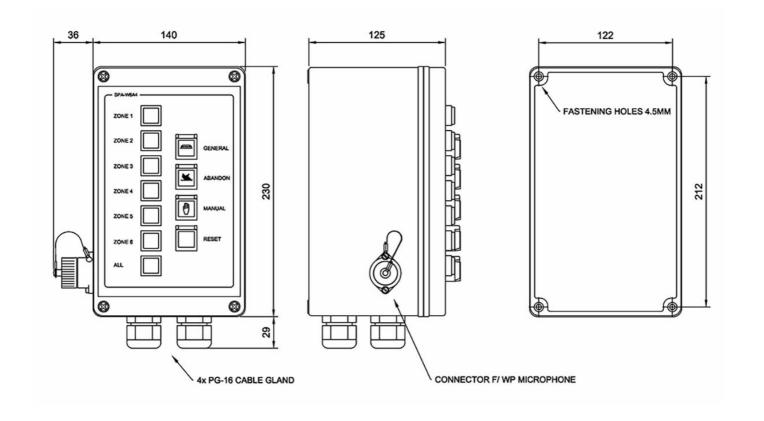

ACCESSORIES



Created: 04.07.2014, updated: 18.12.2015

page 3/3

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Vingtor-Stentofon products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.