

SAFE-10PTF

LOUDSPEAKER BATHROOM



when communication is **critical**

FEATURES

- Loudspeaker w/fuse for accommodation area
- With 100V line transformer
- Wall mounting
- Waterproof
- ABS plastic

INSTALLATION, OPERATION AND MAINTENANCE PROCEDURES

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- To open the cabinet, press the clip on the short end of the cabinet, and lift the cabinet from the mounting plate. Fasten the mounting plate to wall or ceiling by 4 screws, and clip on the front cover.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- The loudspeaker is equipped with four alternative cable entry ports.
- Do not open loudspeaker when energized.




SPECIFICATIONS

Dimensions (mm)	206W x 104H x 55D
Weight	0.8 kg
Mounting	4 screws
Material / Color	ABS / RAL 9010
IP-rating	IP-44
Temperature range	Max. / min. amb. temp 90°C / -40°C
Max. / min. ambient temperature	90°C / -40°C
Cable entry	1x PG-7 / 2x cable inlet 11mm with rubber gasket
Connections	Inside screw terminal
Rated / max. power	10 W / 15 W
SPL 1W/1m	85dB
SPL rated power	95dB
Effective freq.range	160 - 20000Hz
Dispersion	(-6dB)1kHz / 4kHz 140° / 100°

ORDER NUMBER	DESCRIPTION	SHIP WEIGHT
3006100084	SAFE-10PTF Loudspeaker bathroom waterproof with fuse	0,8 kg

SAFE-10PTF LOUDSPEAKER BATHROOM

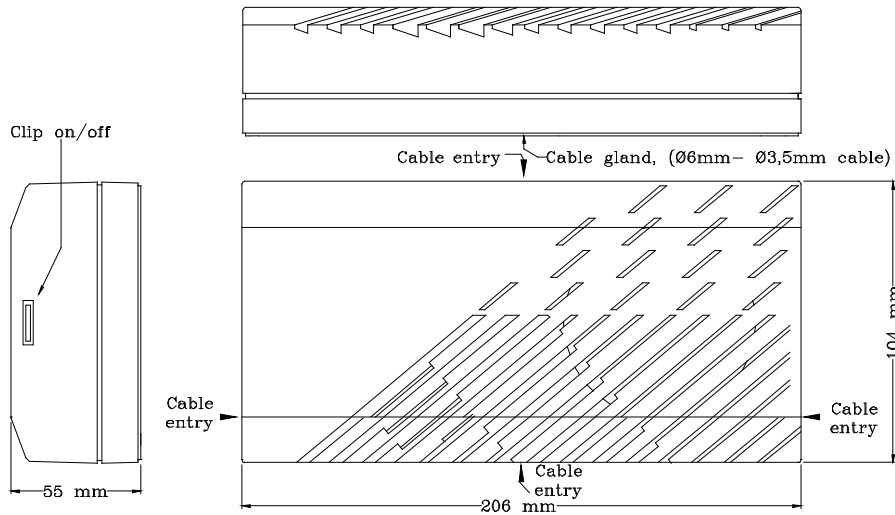

70 V /100 V combined transformer:

Primary connection:
 5 (White) :7 (Green) 70V
 5 (White) : 8 (Red) 100 V

Secondary nominal tapings:

- C : 4 10,0 W
- C : 3 5,0 W
- C : 2 2,5 W
- C : 1 1,0 W

SPL at different frequencies at 1W/1m sine wave.

