

1007007000

Dual Display Station

90 TAD



- Desktop master station with full access to all features in the Vingtor-Stentofon AlphaCom exchange
- The station may use up to 90 Direct Access Keys (DAK) on 9 dynamic DAK pages.
- The dialing keys have letters to be used for search facility in the intercom directory and display text editing
- The station has 4 dynamic navigation keys for quick access to system menus and directory entries
- Status information, guidance and menus are shown on a large 4 line graphic display

DESCRIPTION

The Vingtor-Stentofon Master Station with Dual Display is designed for table-top mounting in bank/finance and office environments. The physical size makes it easy to place on desks with limited space. An optional noise cancelling gooseneck microphone module can be mounted in noisy environments. Most functions and codes are the same as for the Vingtor-Stentofon stations in the InterGuard range. The two easy-to-read displays and navigation buttons ensure quick and easy access to the person you want to reach and the functions you want to perform. The direct access keys are easily programmed from the station and can be changed at any time. The display may be edited to show your personal text.

INSTALLATION

The station can be installed in any Vingtor-Stentofon AlphaCom or AlphaCom M system.

WIRING

The Master Stations with Dual Display are installed by connection to a normal line point in the exchange by using a station cable with RJ45 connectors. Note that some RJ45 connectors may be crossconnected internally.

APPLICATION




The station is primary intended to be used as a table top station in bank / finance environment and offices where quick access to several preprogrammed extension numbers and functions is essential. The direct access key display text can be edited.

SPECIFICATIONS

MECHANICAL

Order Number	1007007000	
Mounting	Table top	
Cable Requirements	2 pair twisted cable 0.5 mmØ, 24 AWG	
Max line length. Operation voltage.	@ 0.5 mmØ, 1400 m / 4600 ft Powered from exchange	
Dimensions: (W x H x D)	72 x 140 x 270 mm. 2.8 x 5.5 x 10.6 inch	
Temperature range	0o - 40oC, 32o - 105oF	
Humidity	Non condensing, 10% - 85% RH	
Loudspeaker Output	1W rms, impedance 50 ohm	
Loudspeaker Impedance		
Frequency Range	-3dB, 300 - 7000 Hz	
Microphone Output Voltage	Voltage 100/300 mV, impedance 1000 ohm	
Wall Socket Connector Type	Modular jack, RJ45	
Direct access display	10 lines, 5-8 characters graphic	
Information display	4 lines, 20 characters graphic	
ORDER NUMBER	DESCRIPTION	SHIP WEIGHT
1007007000	Dual Display Station	0.40 kg
Supplementary equipment:		
1007007010	Microphone for Dual Display Station	0.15 kg
EPKAB 98510	3 m Station Cable with RJ45 Connector	
EPKAB 98515	0.5 m Station Cable with RJ 45 Connector	

TECHNICAL DIMENSIONS

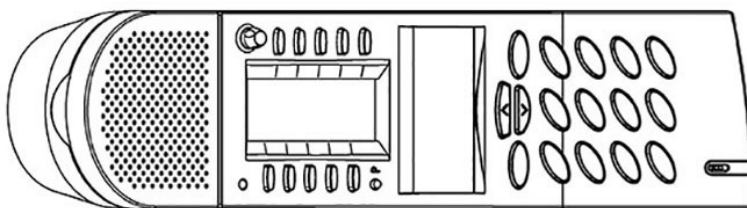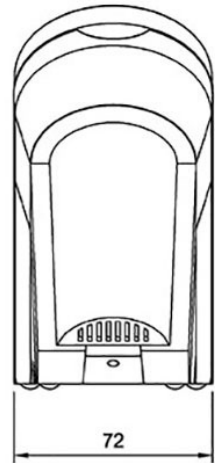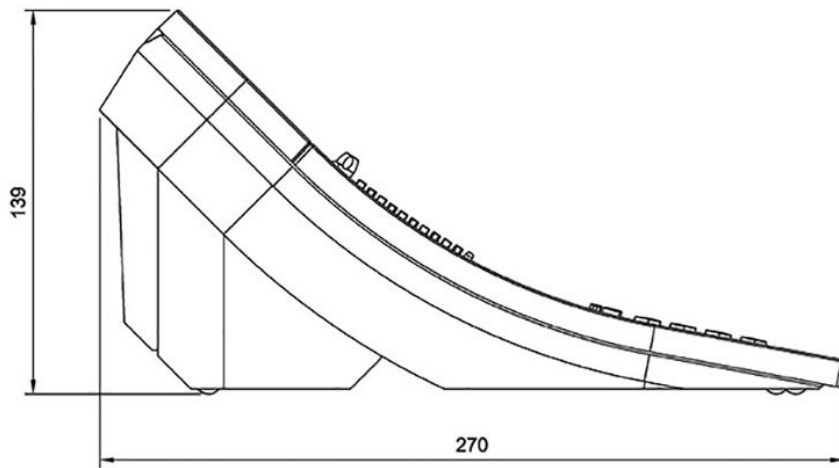

ACCESSORIES



KB171

Item number: 3007600034



MICROPHONE FOR DUAL DISPLAY STATION

Item number: 1007007010