

1008116020

TMIS-2

Turbine Mini Intercom



CISCO Certified



Avaya Certified



Turbine



HD Voice



Automatic Gain Control



Active Noise Cancelling

DESCRIPTION

FEATURES

- Compatible with AlphaCom XE, IC-EDGE iPBX (SIP)
- Active Noise Cancellation
- Vandal Resistant Design
- 11 Gauge Stainless Steel Faceplate
- One Vandal Proof Call Button
- Superb Audio Quality using G.722 Audio Codec (7 kHz)
- Integrated Web Server
- Remote Software Upgrade, Configuration Monitoring
- Line Monitoring
- One Relay Output for Door or Strobe Control
- External Call Button Option
- Class D 10 W Amplifier

DESCRIPTION

The 1008116020 IP Turbine Mini Substation is robust and designed for indoor use. This station is typically used as a communication, information or emergency point and connects directly to the IP network making it easy to deploy anywhere and at any distance.

IMPORTANT NOTE

The station should only be installed indoors and not outdoors as the station electronics are not conformal coated or encased in plastic covering.

The IP station supports open standards and is compatible with AlphaCom and IC-EDGE iPBX using SIP technology. When working in AlphaCom XE mode, the IP station supports special services only available using the Vingtor-Stentofon CCoIP protocol, AlphaCom XE Server. Examples of services are emergency audio broadcast with volume override, call priority and AlphaNet multisite networking and event scripting. Like all Vingtor-Stentofon stations, this IP substation features superb audio quality. The audio quality is enabled through a set of advanced technologies such as active noise cancellation, wide-band audio codec and high power audio outputs.

The station has one relay contact. This relay contact can be used to open a door or turn on/off a strobe light. The relay contact action is programmable and controlled by the AlphaCom XE Server. To provide maximum availability, the station comes with advanced supervision functions. The station line test will detect if there are any faults in the network or the station electronics. In addition, the station supports tone test; testing the complete transmission path including the speaker and microphone.

The status of the station is reported to AlphaWeb as well as to 3rd-party management systems using SNMP, Syslog or OPC.


See also: [additional documentation on wiki.zenitel.com](http://wiki.zenitel.com)

SPECIFICATIONS

SPECIFICATIONS:

Faceplate:	11 gauge, #304 Stainless Steel
Dimensions in inches:	4.5 H x 4.5 W x 2.3 D
Protection Class:	IP 64 with proper installation
Speaker:	2 x 2 square, 45 ohm, 5 watt, waterproof
Power:	Power over Ethernet, IEEE Local Power 24VDC
Indicator:	LED behind translucent red epoxy bonded Lexan lens
Mounting:	Surface or Flush, depth of 2.5" required
Connectors:	1 RJ45 (Ethernet) 10/100 Mbps 6 I/O's 1 Relay Contact
IP Protocols:	IP v4- TCP-HTTPS-TFTP-RTP-RTCP-DHCP-SNMP-DiffServ-TOS-Vingtor-Stentofon CCoIP
LAN Protocols:	Power over Ethernet (IEEE 802.3 a-f), VLAN (IEEE 802.1pq), Network Access Control (IEEE
Audio Technology	Wideband 200 Hz – 7 kHz (G.722) Telephony 3.4 kHz (G.711) Acoustic Echo Cancellation Open Duplex Adapter Jitter Buffer 10 Watt Class D Amplifier Electret Microphone
Management and Operation:	HTTPS (Web Configuration) DHCP and static IP Remote Software Upgrade Centralized Monitoring Status LED
Remote Control:	6 I/O's tool less and one relay contact
Operating temperature range	-25° to 70° C / -13° to 158 ° F
Storage temperature range	-25° to 70° C / -13° to 158 ° F

TECHNICAL DIMENSIONS

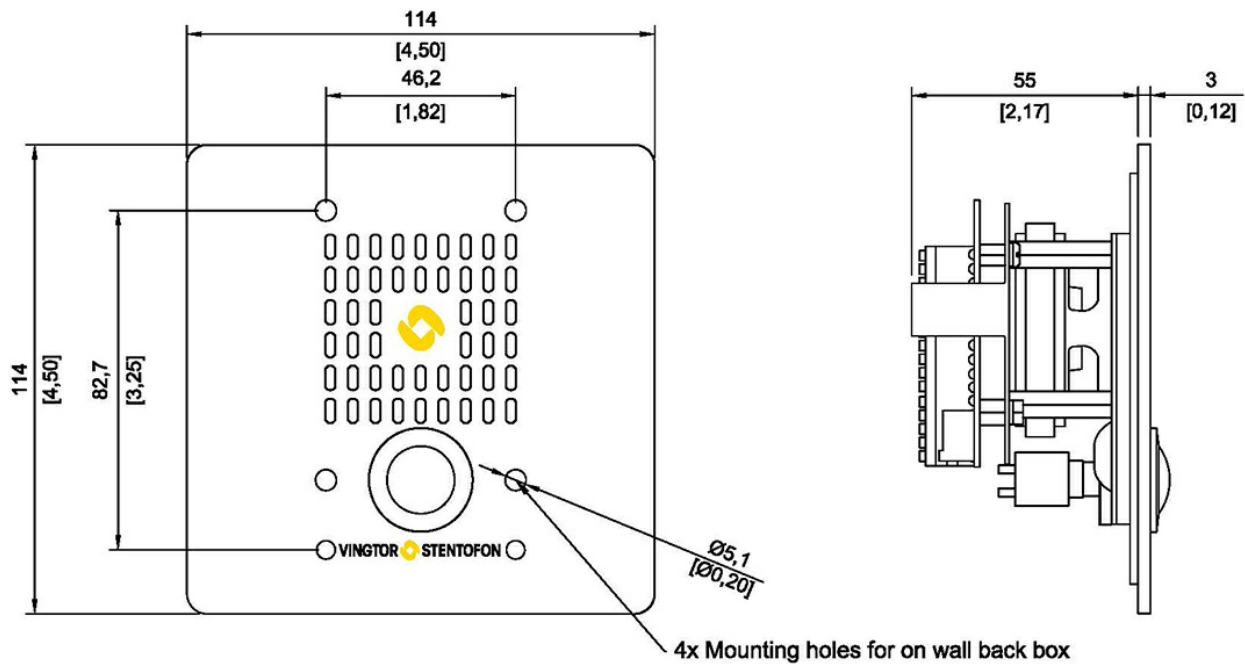

ACCESSORIES



TA-13

Item number: 1008140130



TA-2

Item number: 1008140020



TA-3

Item number: 1008140030