# SPA-W1-V2 WEATHERPROOF PA PANEL



## when communication is critical

#### **FEATURES**

- Weatherproof PA panel for single system
- Built-in pre-amplifier with preset signal level and tone controls
- Microphone with PTT
- Contact for WP handheld microphone P-66 or P-66/10
- Wall mounting outdoor / Indoor
- Local mute contact for external loudspeaker (from hardware version 4.0)

#### DESCRIPTION

This WP panel gives All Call Message in a SPA-V2 public address and general alarm single system.

Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback. Available from hardware version 4.0 This function must be in combination with relay box.




#### **SPECIFICATIONS**

Size (WxHxD)	140 x 230 x 125	
Weight	0. 5 kg	
Material	ABS plastic	
Mounting	Wall	
Output signal	0.775mV 0dB	
Sensivity microphone	200 ohm / 0,5mV	
Connections	Plugable screw terminals for 2.5 mm <sup>2</sup> cable	
Cable glands	2 x PG-16	
Cable size	6 x 2 x 0.75mm2	
Protection	IP-66	

ORDER NUMBER	DESCRIPTION	SHIP WEIGHT
3005010199	SPA-W1-V2 Weatherproof PA Panel for outdoor use P-66 Hand microphone with plug, watertight P-66/10 Hand microphone with plug and 10m cable, watertight	0.5 kg 0.3 kg 0,4 kg

### SPA-W1-V2 WEATHERPROOF PA PANEL

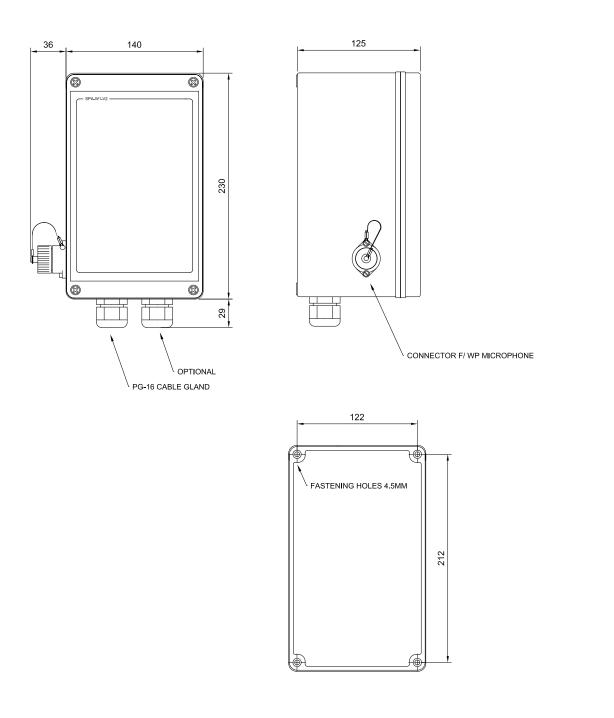

ORDER NUMBER DOC NO A100K10515 3005010199



Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. STENTOFON and VINGTOR products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice. EXPIRITE PROPRIETARY. This document and its supplementing elements, contain Earlief or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend. Zenitel – All rights reserved.

18.06.2013