

1008123040

TFIX-4

Turbine Full-Size EX Intercom Station-4



 IP66

 IEC Ex Intercom

 Atex

 Active Noise Cancelling

 IP over 2-wire

DESCRIPTION

- VoIP intercom for potentially explosive atmospheres Directive 94/9/EC
- Ethernet compatible 2-wire interface
- DIP functionality for use with AlphaCom audio servers
- SIP/VoIP functionality for use with 3rd-party systems
- Dust- and water-protected to IP66
- Monitoring and self-diagnostics of critical functionality
- Visible status indicators on front panel

The TFIX-4 Explosion-proof intercom station is a rugged device, designed for harsh environments and meets industrial and offshore requirements as well as requirements for ATEX Zone 1 operation. The plastic housing is designed to withstand most chemical and environmental hazards found on or offshore.

The TFIX-4 features a full keypad with 1 programmable button and keys for manual override (PTT) and Cancel.

The intercom station is fully digital and offers crystal clear audio with high output through an internal amplifier and optional external speaker. Active Noise Reduction and Acoustic Echo Cancelling allows for hands-free two-way communication with superior audio quality.

Intercom status indicators display the status of the system and are compatible with AlphaCom and Exigo systems as well as SIP functionality for use with 3rd party systems

SPECIFICATIONS

MECHANICAL

Dimensions	188 x 345 x 101 mm
Weight	4 kg
Mounting	On-wall box (included)
Color	Black

ENVIRONMENTAL

Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +70°C
Operating humidity	10% to 95% RH (non-condensing)
Storage humidity	10% to 95% RH (non-condensing)
Air pressure	600 hPa to 1200 hPa
IP rating	IP64 in accordance with IEC 60079-0 IP66 in accordance with EN 60945
IK rating	7J for enclosure 4J for cable glands

ELECTRICAL

PoE	NO, proprietary 2-wire data- and power bus
Power consumption	4.2 W (idle) to 8 W (max)
DC power	24 VDC

NETWORK

Connection	2 x 2-wire
Connection type	Screw terminals
Functions	Auto negotiating
Built-in switch	N/A
Compatibility	SIP, AlphaCom™, Pulse™, G.711, G.722, G.729, HD Voice


INPUTS AND OUTPUTS

Handheld Microphone	Microphone (bal), PTT
Handset	Microphone (bal), Speaker (bal) + PTT
Handset	Microphone (bal), Speaker (bal) + PTT
Digital inputs/outputs	No
Relay outputs	No
Audio	Yes, for audio accessories
Aux power	Provided by network cable

CERTIFICATIONS

Immunity	EN 60945, EN 61000-6-2
Emission	EN 60945, EN 61000-6-3, EN 61000-6-4
Safety	EN 60079-0: 2012
	EN 60079-7: 2007
	EN 60079-11: 2011
	EN 60079-18: 2009
	II 2(2) G Ex e ib mb [ib] IIC T4 Gb -20°C ≤ Ta ≤ +60°C

TECHNICAL DIMENSIONS

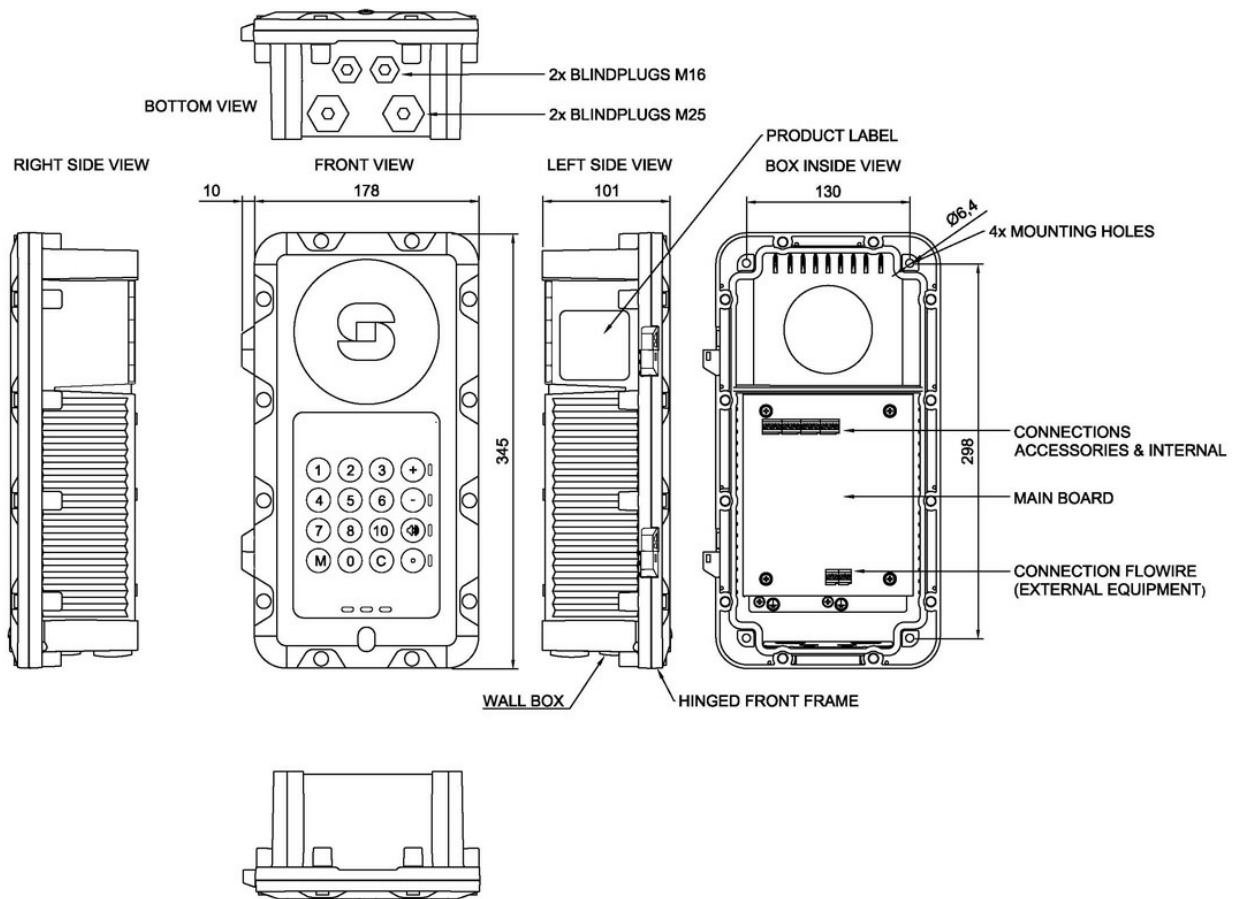

ACCESSORIES



1023533511

EMMAX-1H



1008150025

TAX-2B



1008150030

TAX-3



AK5850HS

AK5850HS



1008080210

FCDC2



2990102120

POWERBOX PSU, 24V DC, 120W



2990102240

POWERBOX PSU, 24V DC, 250W